
Toilet Partition Privacy Covers

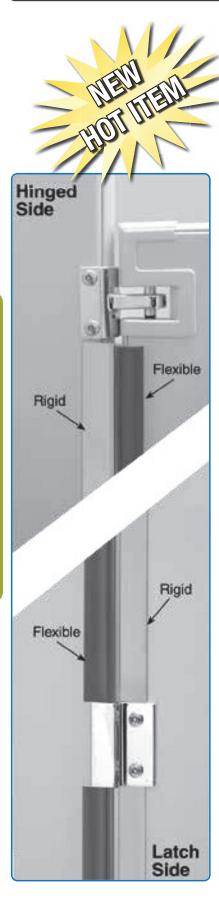

"Privacy Cover" pater

Smoke/Opaque

Flexible Vinyl

Features:

- Eliminates most door and panel gaps.
- Assures personal privacy.
- Self-adhesive for fastener free installation.
- Clear rigid vinyl blends to all partition colors and materials.
- Cut to fit for various partition door installations.
- Flexible vinyl flap adapts to multiple applications. The smoke/opaque color and serrated surface obscures vision.

Contents:

• 2) 58" pieces per set (poly bagged) / 5 sets per carton



• Pencil; Measuring tape; Isopropyl rubbing Alcohol; Multi-purpose Snips and Diagonal pliers

Easy Installation:

• For door gap applications (apply to post ONLY)

A) Latch side:

- Measure from top of door to top of strike / keeper, then measure from bottom of strike / keeper to bottom of door.
- Pre-Cut the "Privacy Cover" with either (Multi-Purpose Snips, Diagonal Pliers or other safe cutting device) to the above measurements and align the cover to the post. Clean up the rough edges with a utility knife or fine grade sandpaper if necessary.
- Always place the cover on the side opposite to the direction of the door opening.
- Clean surface of post, where the "Privacy Cover" is to be mounted, with (isopropyl) rubbing alcohol. Do Not Use Household Cleaners.
- Remove adhesive backing from flat surface of the cover. Use Locator Tab to assist in placement. Press firmly to the post and apply pressure, using an up and down motion to set the adhesive.
- Toilet partition doors may be hinged with different style hinges, installation will vary slightly, but cover will always be placed on the post side opposite to the direction of door opening.

B) Hinge Side:

• Pivot Hinge:

Measure from top of door to top of top hinge, and then measure from bottom of the top hinge to top of bottom hinge. Usually it will not be necessary to place "Privacy Cover" below the bottom hinge.


• Surface Hinge:


Measure door from top to the bottom. Hold "Privacy Cover" to post and determine if adhesive surface will make contact with the hinge fastener heads. If this condition exists, merely cut out a wedge of material at the point of contact with the fastener heads to allow the cover to make an unhindered flat contact to the post.



Clear/Obscure

Rigid Vinyl










NOTE: Use the same cutting, prepping and application directions as indicated under "Latch Side".


PRIVACY COVERS

Toilet Partition Design

FOR A QUICK RESPONSE ON PARTITION QUOTES PLEASE:

- *Visit* our website for blank templates in the *design center* link in the toilet partition home page.
- Fax us the Overhead Drawing to 800-642-2406 OR email to contact@robertbrooke.com







POWDER COATED STEEL

Materials — Five are available

polyester powder coated finish over galvanized steel with honeycomb core.

The industry standard. Most economical hybrid epoxy/



Aesthetic appeal and economy. Pressure laminate smooth surface, resistant to grease and stains.

SOLID PLASTIC

The choice for busy public facilities, high density polyethyene (HDPE) polymer is highly resistant to stains, common acids and cleaning agents, as well as moisture, steam, and corrosion. Will not easily dent or chip.



STAINLESS STEEL

Gleaming beauty provides exceptional durability and modern styling. Available in #4 satin or textured finish.

PHENOLIC - BLACK CORE

Impact, moisture, and corrosion resistant, the surfaces are smooth and easy to clean. Ideal for extreme moisture conditions in showers, pools, and saunas, or when maintenance includes hosing down washrooms.

OVERHEAD BRACED/FLOOR ANCHORED

Units are recommended for heavy traffic and necessary vandalism-proof areas. Most economical. Anodized aluminum goes around top. They do not require any special floor construction, therefore they can be used in old or new buildings.

FLOOR-TO-CEILING ANCHORED

Better than overhead braced for heavy traffic and vandalism-proof areas. Most stable as pilasters are anchored into concrete floor and structural ceiling support.




FLOOR MOUNTED

Absence of top structure prompts the use of these units in low ceiling areas. Gives modern, contemporary appearance. They require a 3" minimum concrete floor construction to secure anchor bolts.

CEILING HUNG

Ceiling Hung is the best choice where minimizing maintenance is of primary importance. They provide a floor area free from obstruction to speed maintenance. However this design requires structural steel supports in the ceiling.








Between 2 Walls In-a-Corner

Layout – Examples

Free Standing







Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com Copyright @ 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates

Styles — Four are available


Powder Coated Steel Partitions



44

Complete Restroom Stalls

- Very economical and often used.
- Finish is a hard hybrid epoxy/polyester powder coated finish over rust resistant phosphate treated steel. With inner honeycomb core bonded to the steel with a non-toxic adhesive to ensure solid construction and sound attenuation. Assembled with a continuous roll-formed interlocking crown molding, with corners brazed and ground smooth.
- Doors, panels and urinal screens 1" thick, 22 gauge steel. Doors and panels are 58" high.
- Pilasters 1-1/4" thick, 20 gauge steel.
- Hardware Cam action hinge permits door to remain at • desired position when not in use. Hinges, strike and keeper, coat hook, latch, and bracket s are chrome plated alloy. Concealed latch assembly allows for emergency access. Pilaster shoes are 304 stainless steel.
- Installation instructions, all mounting hardware and a can of touch up paint are supplied with each order.

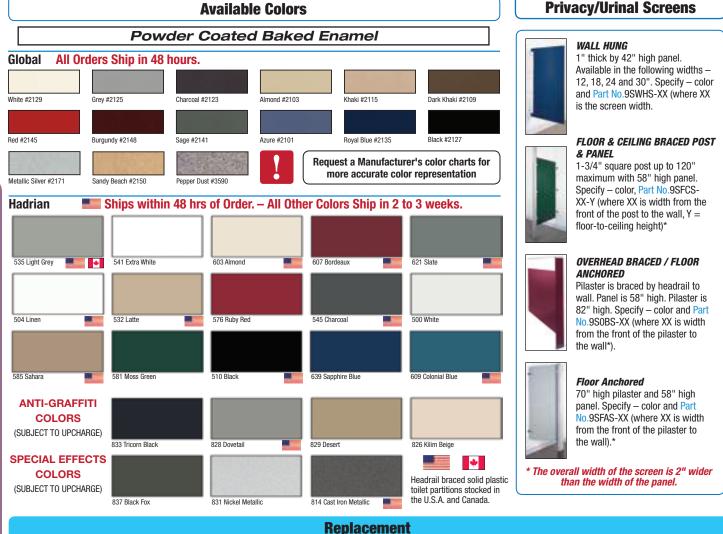

<u> 4 4</u>

Doors

Includes: Hinges and All Hardware Available for the following door opening widths (actual door size is 3/8" narrower than the opening): 20, 22, 24, 26, 28, 30, 32, 34, 36". Specify -

- Color
- Part No. 9TDS-XX (where XX is door opening width)
- Pilaster type Standard round edge, square edge or mounted on flat wall

Panels Includes: 4 Brackets

Actual width is 1/2" less.

60, 70 and 76"

panel width).

Specify -

Color,

Available in the following widths:

16, 22, 28, 34, 40, 46, 52, 55, 58,

Part No. 9TPS-XX (where XX is

Reinforcing for grab bars available.

Pilasters

Includes: Brackets & Stainless Steel Shoes Available in the following widths: 2, 3, 4, 5, 6, 7, 8, 10, 12, 16, 18, 20, 22 and 24".

- Specify -
- Color.
- Part No. 9TLS-XX (where XX is pilaster width)
- · Overhead braced for 82" length, floor braced for 70" length, wall hung for 58" high, ceiling hung for 84" length, and floor-to-ceiling for up to 120" maximum length.

Aluminum Headrail

Available in the following lengths: 65" or 83". And for 1" and 1-1/4" thick pilasters. Specify-

- Part No. 9THS-XX-Y (where XX is length and Y is pilaster thickness). 1-1/4" Wide Pilaster, Anti-grip type. Has 1/4" slot for curtain.
- Robert Brooke & Associates 1465 Axtell Dr., Ste.B, Troy, MI 48084 Phone: 800-642-2403 Fax: 800-642-2406 www.robertbrooke.com Copyright © 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates

- Gives a more aesthetic appeal while maintaining economy.
- Fabricated from 45 pound density, resin impregnated particle board. Plastic laminate is glued to particle board with a nontoxic, water resistant adhesive under high pressure. Components are edge banded prior to face lamination to ensure moisture run-off and vandal resistance. Not recommended for high moisture areas.
- Doors, panels and urinal screens 1" thick (uses 7/8" particle board)
- Pilasters 1-1/4" thick (uses 1-1/8" particle board)
- Hardware Gravity cam-action hinges permit door to remain at desired position when not in use. Hinges, strike and keeper, coat hook, latch and brackets are chromed plated alloy. Door can be lifted to allow emergency access.
- Installation instructions and all mounting hardware are supplied with each order.

Replacement

Doors	Panels	Pilasters	Aluminum Headrail
Includes: Hinges and All Hardware Available for the following door opening widths (actual door size is 3/8" narrower than the opening) — 22, 24, 26, 28, 30, 32, 34, and 36" Specify — • Color • Part No. 9TDL-XX (where XX is door opening width)	Includes: 4 Brackets Available in the following widths: 16, 22, 28, 34, 40, 46, 52, 55, 58, 60, 70 and 76". Actual width is 1/2" less. Specify — • Color, • Part No. 9TPL-XX (where XX is panel width).	Includes: Brackets & Stainless Steel Shoes Available in the following widths: 3, 4, 5, 6, 7, 8, 10, 12, 16, 18, 20, 22 and 24". Specify — • Color, • Part No. 9TLL-XX (where XX is pilaster width) • Overhead braced for 80" length, wall hung for 55" length and floor-to-ceiling for up to 116" maximum length.	 Available in the following lengths: 65" or 83". And for 1" and 1-1/4" thick pilasters. Specify— Part No. 9THL-XX-Y (where XX is length and Y is pilaster thickness). 1-1/4" Wide Pilaster, Anti-grip type. Has 1/4" slot for curtain.

Privacy/Urinal Screens



WALL HUNG

1" thick by 42" high panel. Available in the following widths – 12, 18, 24 and 30". Specify – color and Part No.9SWHL-XX (where XX is the screen width.

FLOOR & CEILING BRACED POST & PANEL

1-3/4" square post up to 120" maximum with 58" high panel. Specify – color, Part No.9SFCL-XX-Y (where XX is width from the front of the post to the wall, Y = floor-toceiling height)*




OVERHEAD BRACED / FLOOR ANCHORED

Pilaster is braced by headrail to wall. Panel is 58" high. Pilaster is 82" high. Specify – color and Part No.9S0BL-XX (where XX is width from the front of the pilaster to the wall*).

Floor Anchored

70" high pilaster and 58" high panel. Specify – color and Part No.9SFAL-XX (where XX is width from the front of the pilaster to the wall).*

* The overall width of the screen is 2" wider than the width of the panel.

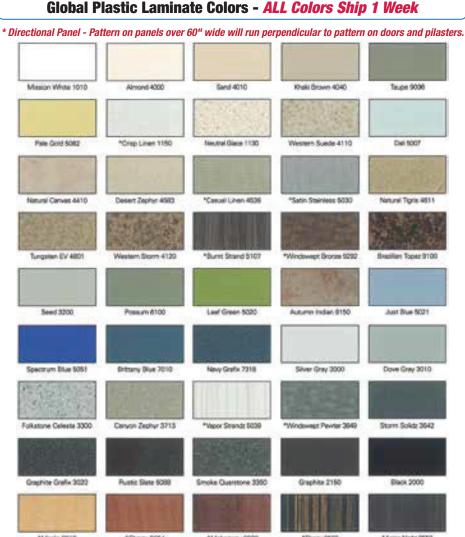

Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com

- Designed for high-traffic public facilities, parks and schools.
- The high-density polyethylene material has homogenous color throughout each component. Self-lubricating surface resists markings from pens, pencils, etc. Has low maintenance; good durability; water resistant, unaffected by steam or high humidity. Available in overhead braced/floor anchored and floor-to-ceiling anchored only.
- Doors, panels, pilasters and urinal screens 1" thick, doors and panels are 55" high.

Privacy/Urinal Screens

WALL HUNG


screen width.

& PANEL

ANCHORED

• Hardware — Available in hidden integral hinges or wrap around vaulttype hinges. Cam-action hinge permits door to remain at desired position when not in use. Slide latch, striker and keeper, and coat hook are chrome plated alloy. Slide latch assembly allows for emergency access. Standard brackets are 54" long extruded PVC colored to match partitions. Pilaster shoes are molded plastic to match partitions. Stainless steel shoes and full height aluminum brackets are available at no up charge.

 Installation instructions and all mounting hardware are supplied with each order.

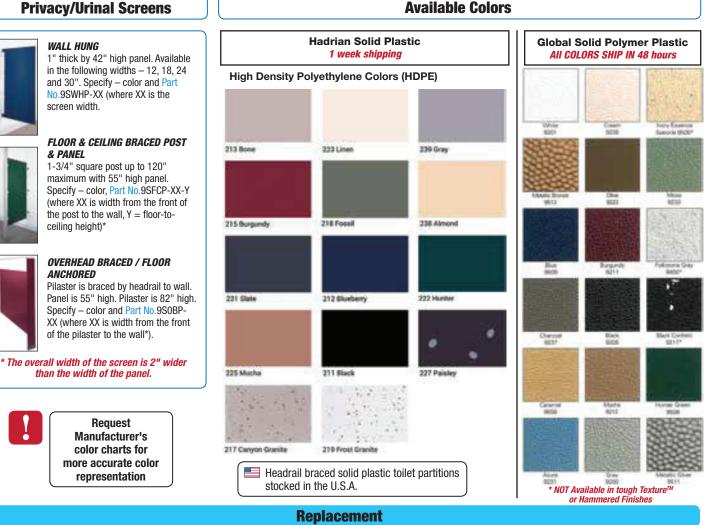

Doors

Includes: Hinges and All Hardware Available for the following door opening widths (actual door size is 3/8" narrower than the opening): 20, 22, 24, 26, 28, 30, 32, 34, 36". Specify -

- Color
- Part No. 9TDP-XX (where XX is door opening width)
- Pilaster type Standard round edge, square edge or mounted on flat wall

Panels Includes: 4 Brackets

Actual width is 1/2" less.

60.70 and 76".

panel width).

Specify ----

Color.

•

٠

Available in the following widths:

16, 22, 28, 34, 40, 46, 52, 55, 58,

Part No. 9TPP-XX (where XX is

Reinforcing for grab bars available.

Pilasters

Includes: Brackets & Stainless Steel Shoes Available in the following widths: 3, 4, 5, 6, 7, 8, 10, 12, 16, 18, 20, 22 and 24". Specify -

- Color.
- Part No. 9TLP-XX (where XX is pilaster width)
- · Overhead braced for 82" length, floor braced for 70" length, wall hung for 58" high, ceiling hung for 84" length, and floor-to-ceiling for up to 120" maximum length.

Aluminum Headrail

Available in the following lengths: 65" or 83". And for 1" and 1-1/4" thick pilasters. Specify-

• Part No. 9THP-XX-Y (where XX is length and Y is pilaster thickness). 1-1/4" Wide Pilaster, Anti-grip type. Has 1/4" slot for curtain.

STAINLESS STEEL PARTITIONS

- Provides gleaming beauty, exceptional durability and modern styling.
- Type 304 stainless steel with a #4 finish bonded to an inner honeycomb core under pressure with a non-toxic adhesive to ensure solid construction and sound attenuation. Assembled with continuous rollformed interlocking, 22 gauge stainless steel crown molding, with corners welded and ground smooth.

- Doors, panels and urinal screens 1" thick, 22 gauge stainless steel.
- Pilasters 1-1/4" thick, 22 gauge stainless steel.
- Hardware Cam-action hinges permit door to remain at desired position when not in use. Hinges, strike and keeper, coat hook and latch are chrome plated alloy. Concealed latch allows for emergency access.
- Installation instructions and all mounting hardware are supplied with each order.

Privacy/Urinal Screens

WALL HUNG

1" thick by 42" high panel. Available in the following widths - 12, 18, 24 and 30". Specify – color and Part No.9SWHSS-XX (where XX is the screen width.

FLOOR & CEILING BRACED POST & PANEL

1-3/4" square post up to 120" maximum with 58" high panel. Specify - color, Part No.9SFCSS-XX-Y (where XX is width from the front of the post to the wall. Y = floor-toceiling height)*



OVERHEAD BRACED / FLOOR ANCHORED

Pilaster is braced by headrail to wall. Panel is 58" high. Pilaster is 82" high. Specify - color and Part No.9S0BSS-XX (where XX is width from the front of the pilaster to the wall*).



Floor Anchored

70" high pilaster and 58" high panel. Specify - color and Part No.9SFASS-XX (where XX is width from the front of the pilaster to the wall).*

The overall width of the screen is 2" wider than the width of the panel.

Urinal Splash Plates

Stainless Steel				
HEIGHT WIDTH PART NO.				
Cover panels or	41"	16"	9TUSP16	
screens near urinal.	41"	22- 1/2"	9TUSP22	
Stainless steel.	36"	24"	9TUSP24	
	36"	30"	9TUSP30	
Attach with rivets.	36"	36"	9TUSP36	



Replacement

Doors

Includes: Hinges and All Hardware Available for the following door opening widths (actual door size is 3/8" narrower than the opening): 20, 22, 24, 26, 28, 30, 32, 34, 36". Specify -

- Color
- Part No. 9TDSS-XX (where XX is door opening width)
- Pilaster type Standard round edge, square edge or mounted on flat wall

Panels Includes: 4 Brackets

Actual width is 1/2" less.

60, 70 and 76"

panel width).

Specify -

Color.

Available in the following widths:

16, 22, 28, 34, 40, 46, 52, 55, 58,

• Part No. 9TPSS-XX (where XX is

· Reinforcing for grab bars available.

Pilasters

Includes: Brackets & Stainless Steel Shoes Available in the following widths: 2, 3, 4, 5, 6, 7, 8, 10, 12, 16, 18, 20, 22 and 24".

- Specify -Color,
- Part No. 9TLSS-XX (where XX is pilaster width)
- Overhead braced for 82" length, floor braced for 70" length, wall hung for 58" high, ceiling hung for 84" length, and floor-to-ceiling for up to 120" maximum length.

Aluminum Headrail

Available in the following lengths: 65" or 83". And for 1" and 1-1/4" thick pilasters. Specify-

 Part No. 9THSS-XX-Y (where XX is length and Y is pilaster thickness). 1-1/4" Wide Pilaster, Anti-grip type. Has 1/4" slot for curtain.

- Ideal for extreme moisture conditions in showers, pools and saunas. Surfaces are smooth and easy to clean.
- · Phenolic material is comprised of multiple layers of melamine resin impregnated kraft paper to give a black core and a decorated surface sheet on both faces. All layers are fused together under high pressure. Material of choice where durability and strength are required. Uses stainless steel brackets. Impact and corrosion resistant; does not support bacteria.
- Panels and urinal screens 1/2" thick
- Hardware Cam-action hinge permits doors to return to a preset position when not locked. Hinges, strike and keeper are brushed aluminum. Camaction hinge allows emergency access by lifting door.
- Installation instructions and all mounting hardware are supplied with each order.

• Doors and pilasters — 3/4" thick

Replacement

Includes: 4 Brackets

Includes: Hinges and All Hardware Available for the following door opening widths (actual door size is 3/8" narrower than the opening): 20, 22, 24, 26, 28, 30, 32, 34, 36". Specify -

- Color

Doors

- Part No. 9TDPH-XX (where XX is door opening width)
- Pilaster type Standard round edge, • square edge or mounted on flat wall

Available in the following widths: 16, 22, 28, 34, 40, 46, 52, 55, 58, 60, Actual width is 1/2" less. Specify -

Specify -

Color,

70 and 76'

Panels

- Part No. 9TPPH-XX (where XX is panel width).
- Reinforcing for grab bars available.

Includes: Brackets & Stainless Steel Shoes Available in the following widths: 2, 3, 4, 5, 6, 7, 8, 10, 12, 16, 18, 20, 22 and 24".

· Color,

Pilasters

- Part No. 9TLPH-XX (where XX is pilaster width)
- · Overhead braced for 82" length, floor braced for 70" length, wall hung for 58" high, ceiling hung for 84" length, and floor-to-ceiling for up to 120" maximum length.

Aluminum Headrail

Available in the following lengths: 65" or 83". And for 1" and 1-1/4" thick pilasters. Specify-

• Part No. 9THPH-XX-Y (where XX is length and Y is pilaster thickness). 1-1/4" Wide Pilaster, Anti-grip type. Has 1/4" slot for curtain.

Global Solid Phenolic Colors - ALL Colors Ship in 1 -2 Weeks

"Color-Thru" Phenolic Cinnamon 5450C Persian Blue 7450C Gray Misy 3450C Sage 6450C HazeInut 4450C Black 2000C Standard Black Core Colors Almond 4000 Neutral Glace 1130 Natural Canvas 4410 Tungsten EV 4801 Taupe 9096 Desert Zephyr 4583 Silver Gray 3000 Folkstone Celesta 3300 Dove Grav 3010 Graphite Grafix 3020







Grab Bars



ADA ACCESSIBLE COMPARTMENT 6 **REQUIRE:**

- 1-1/4" or 1-1/2" Dia. bars, at least a 42" long on side and at least a 36" long behind the toilet. (Most popular are 36" and 42" long, 1-1/2" diameter, concealed set screws.)
- · In compliance with strength requirements of ADA guidelines.
- · Bars are fabricated of a satin finish 18 Gauge type 304 stainless steel tubing.
- · Available peened or smooth.
- · Mandrell bending process ensures uniform bar diameters.
- · Heliarc welding forms a single structural unit.

Left Hand (shown),

Model No. 2257

Model No. 2256

Right Hand,



STRAIGHT BARS		
PART NO.	LENGTH	
K7410	12"	
K7411	16"	
K7412	18"	
K7413	24"	

STRAIGHT BARS WITH CENTER POST		
PART NO.	LENGTH	
K7415C	42"	
K7416C	36"	
K7417C	48"	

TOILET PARTITION BARS PART NO. LENGTH K74183 52" 54" K74184

STRAIGHT BARS PART NO. LENGTH K7414 32" 42" K7415 K7416 36" K7417 48"

49

Specify Part Number, Flange Type, 1-1/4" or 1-1/2" Diameter when ordering

Choose One of 3 Flange Types

EXPOSED MOUNTING

Left Hand (shown),

Model No. 2210

Right Hand opposite

- · Flange is 3" diameter, 1/8" thick type 304 stainless steel with satin finish.
- · Exposed mounting screw holes are drilled and countersunk.

21"

12

30

5'



- · Cover snaps over mounting flange dimples to conceal screws.
- · Concealed mounting flange is 3-1/8" O.D. diameter with two screw holes and three locking dimples and
- is 1/8" thick, type 304 stainless steel. · Cover is type 304 stainless steel with
- satin finish, 22 gauge, 3-3/16" diameter.

CONCEALED MOUNTING

- •Flange is 3" diameter. 1/2" deep, 11 gauge type 304 stainless steel with satin finish.
- Tenon plate is 13 gauge with slotted screw holes.
- · Flange is secured to tenon plate with 3 stainless steel allen head screws.

MODEL

7450

7456


7457

7460

Left Hand (shown), 30 Model No. 2245L


Grab Bars for Toilet Stools

Right Hand, Model No. 2245R






8'



Left Hand (shown),

Model No. 2231



A = 36''B = 54''A = 42" B = 52" A = 18" B = 30''


LENGTH

A = 36"

B = 24"

SWING-UP GRAB BAR Locks firmly into place when lifted into an upright position 1-1/4" 0.D. Model No. 3410

32'



Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com Copyright @ 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates



ESTROOM ACCESSORIES



Copyright © 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates.

51

RESTROOM ACCESSORIES

Paper Towel Dispensers				
	SINGLE FOLD PAPER TOWEL DISPENSER •Holds 400 Towels •Sheet Metal Construction •11"w x 6"h x 5"d ITEM PART NO. WHITE 9AT500 CHROME 9AT500C		C-FOLD, MULTI-FOLD PAPER TOWEL DISPENSER • Heavy Gauge Steel Back with Impact Resistant Plastic Front • Holds 540 Multi-fold or 335 C-fold Towels • 11"w x 15"h x 4"d	C-FOLD, MULTI-FOLD METAL PAPER TOWEL DISPENSER • Tumbler Lock, Sheet Metal and Heavy Duty Piano Hinge • Holds 525 Multi-fold or 400 C-fold Towels • 11" w x 15"h x 4"d ITEM PART NO.
1	C-FOLD, MULTI-FOLD SMALL METAL PAPER TOWEL • Tumbler Lock, Stainless Steel and Heavy Duty P • Holds 275 Multi-fold or 200 C-fold Towels • 11"w x 8"h x 4"d Part No. 9AT0215		COVER COLOR PART NO WHITE 9AT175V DARK TRANSLUCENT 9AT1751	WHITE ENAMEL9AT130VCHROME PLATED9AT130CSTAINLESS STEEL9AT0210
3	 ROLL TYPE - BOTTOM PULL TOWEL DISPENSER #4 Satin Finish Type 304 Stainless Steel Exposed Towel Allows User to Pull Out Predetermined Amount of Towel and Tear Off Holds Rolls up to 8"wide non-perforated roll 11"w x 16"h x 9"d Part No. 9AU170HF 			
	ROLL TYPE, CRANK TOWEL DISPENSER • Holds Rolls 8"w x 500' • Dent Resistant White Enamel Steel Part No. 9AT675		For Rolls 8 th w x 8 th dia. Towels are Dispensed Automatic 11 th w x 16 th x 9 th d COVER COLOR PAR	T225T
	 ROLL TYPE - BOTTOM PULL TOWEL DISPENSER Translucent Impact Resistant Plastic Front For Rolls 8"w x 8" dia. 11" Sheet via. Auto-Cut Mechanism 11"w x 16"h x 9"d Part No. 9AT400T 			
		Electric Air D	ryer	
	HEAVY DUTY NO TOUCH HAND/HAIR DRYER • Tough Die-cast Aluminum Housing with Baked Enamel Finish • 2300 Watts of Power • Surface or Recessed Mounted • 13"w x 9"h x 7"d • 5 Year Warranty NO TOUCH HOUSING BAKED ENAMEL STAINLESS STEEL CHROME PLATED 9U1525CEA		TURBO DRI HIGH SPEED DRYER • Heavy Duty Stailess Steel Housing • Infrared sensor • 12 second dry time • 60 second shut off • 120 Thru 240 Voltage • Surface Mounted • Sound level: 65dB to 78dB • 8-1/16"w x 12"h x 7-5/64"d • ITEM PART NO. WHITE 9A0197W SATIN SS 9A0197S BRIGHT SS 9A0197B	BLUSTORM HANDSFREE HIGH SPEED DRYER • Stainless Steel • Less than 10-15 sec. dry time • Blue light allows user to
	 HANDS FREE METAL AUTO HAND DRYER Painted Cast Aluminum Approximate drying time of 30 sec. Dryer shall deliver 150 CFM Sound level: 64dB Volts: 120 11-3/16" X 9-3/4" X 8" Part No. 9HD907 		 HANDS FREE ABS PLASTIC HAND DF High grade fire retardant ABS Approximate drying time 30 sec. Power cut off automatically in ca of irregular use 120 sec Dryer shall deliver 150 CFM Volts: 120 10-1/2" X 8-3/4" X 6-3/4" Part No. 9HD903 	YER maximize the dryers efficience • One piece cover with 2 vandal- proof lock screws & key wrench • Over a 70% cost savings vs. conventional hand dryers

RESTROOM ACCESSORIES

Lexan or Stainless Steel Corner Guards

• Available in 6 colors: Clear (standard), white, almond, dark almond, gray and black.


Restroom - 9R840B

- · Stainless steel available in satin or bright finish.
- Installation options are screws or double-sided tape.

	PART NUMBER Length		
WINGS	48 "	96 "	
1-1/8" X 1-1/8"	KCG148	KCG196	
2-1/2" X 2-1/2"	KCG248	KCG296	

Specify: part number, material, color and screws or tape installation.

Paper Towel Dispensers & Waste Receptacles

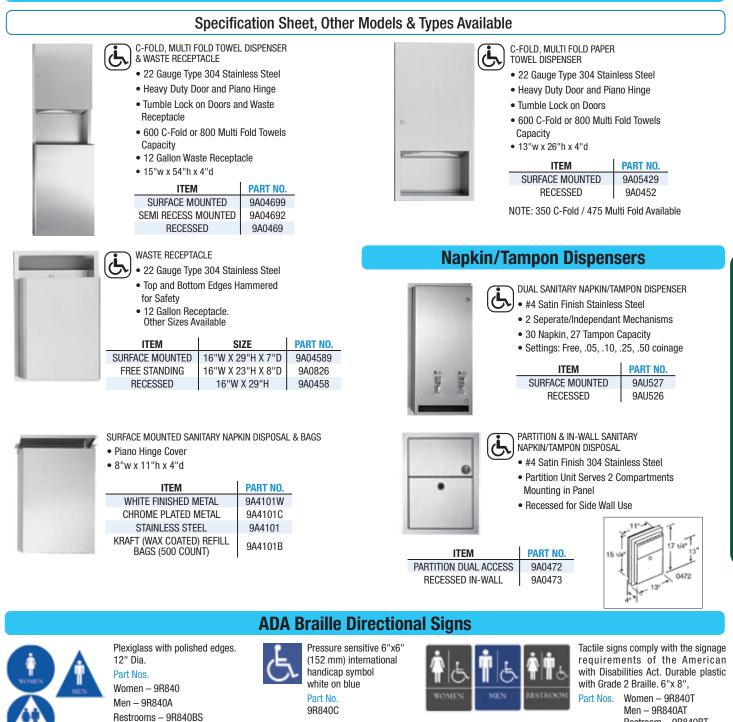


RESTROOM ACCESSORIES

Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com 53 Copyright @ 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates

Restroom - 9R840BT

Mirrors

Height

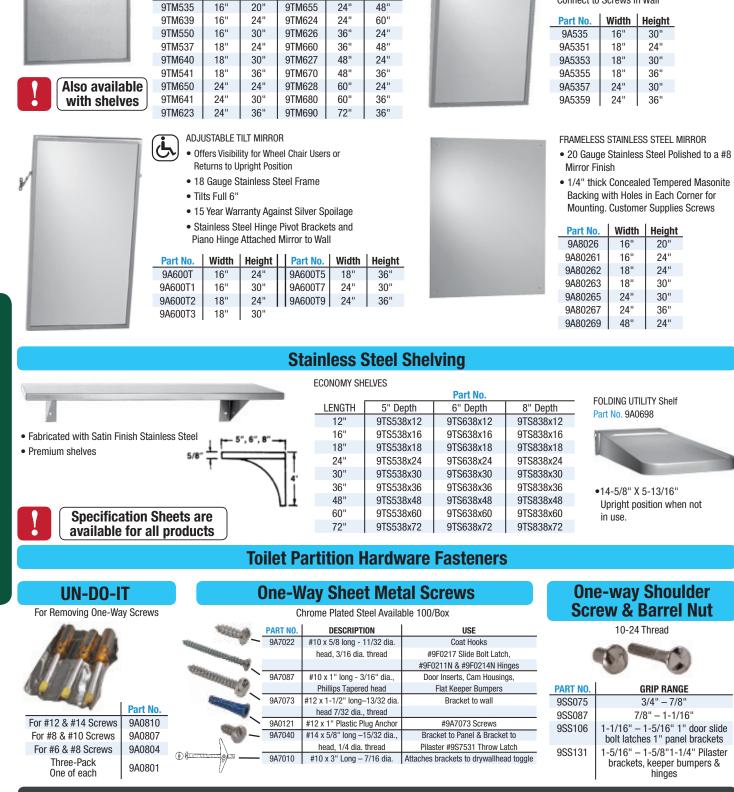

100.600.000	9TM535	16"
	9TM639	16"
0.00000000	9TM550	16"
	9TM537	18"

CHANNEL FRAME PLATE GLASS MIRROR

• 1/2" x 1/2" x 1/2" One Piece Channel

Part No. | Width |

Type 304 Satin Finish Stainless Steel

• 15 Year Warranty Against Silver Spoilage

· Includes bracket for Easy Secure Installation

Height

Part No.

Width



Ŀ

Connect to Screws in Wall			
Part No.	Width	Height	
9A535	16"	30"	
9A5351	18"	24"	
9A5353	18"	30"	
9A5355	18"	36"	
9A5357	24"	30"	
9A5359	24"	36"	

FIXED ANGLE TILT MIRROR


· Offers Visibility for Wheel Chair Users

RESTROOM ACCESSORIES

54

54

Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com Copyright © 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates

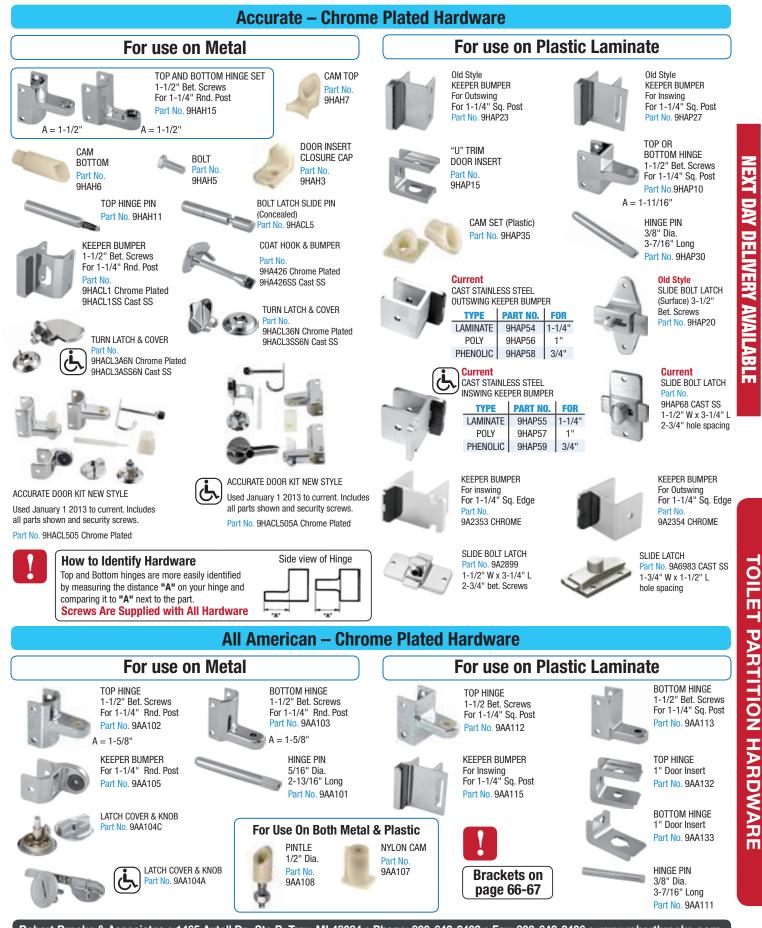

Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com Copyright © 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates.



Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com Copyright © 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates.


TOILET PARTITION HARDWARE




Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com Copyright @ 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates

57


TOILET PARTITION HARDWARE

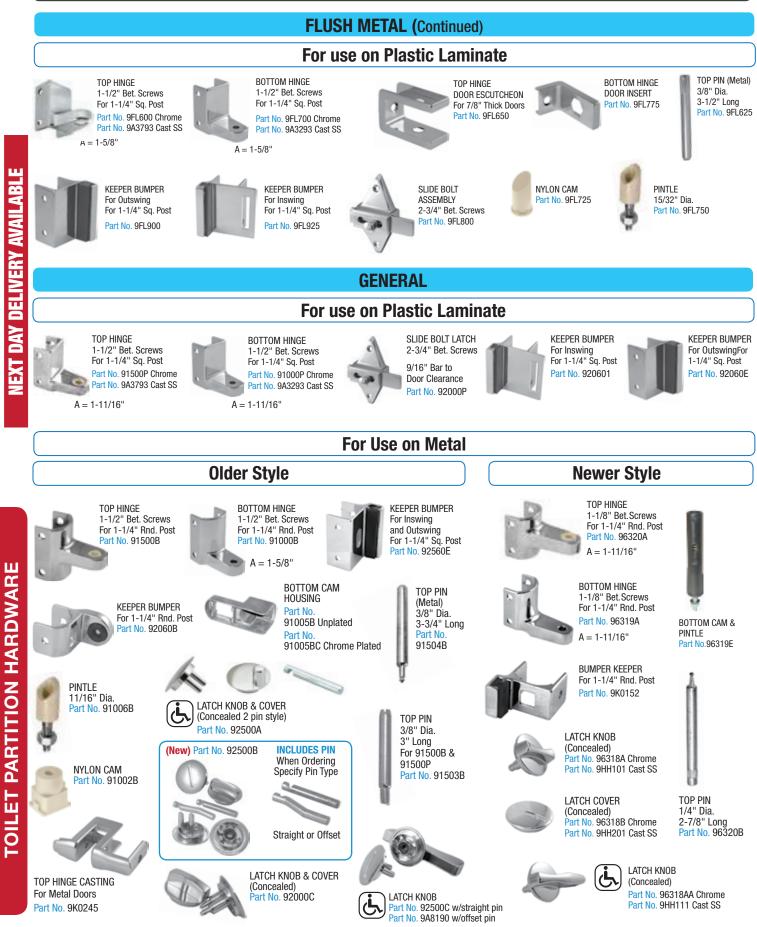

Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com Copyright © 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates.

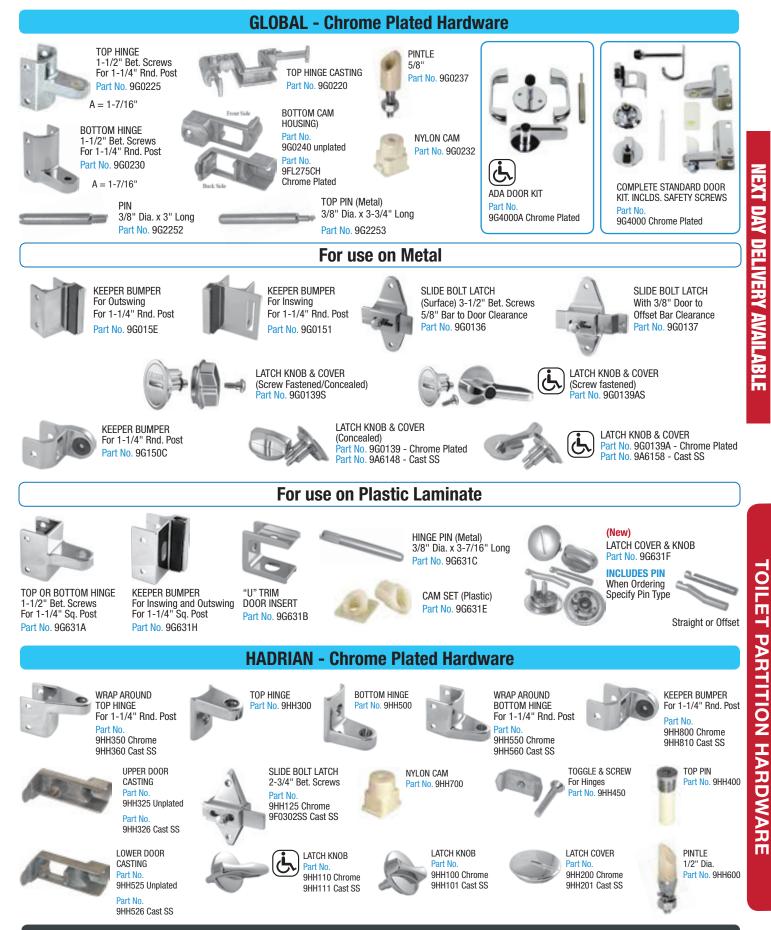


Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com Copyright © 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates.

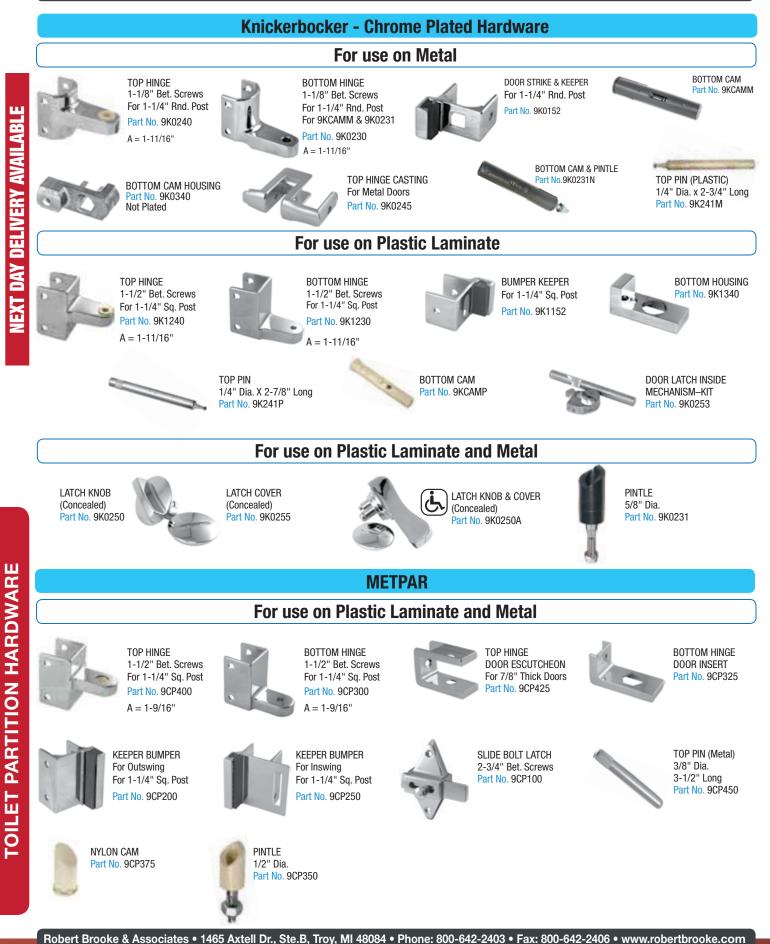




61


TOILET PARTITION HARDWARE

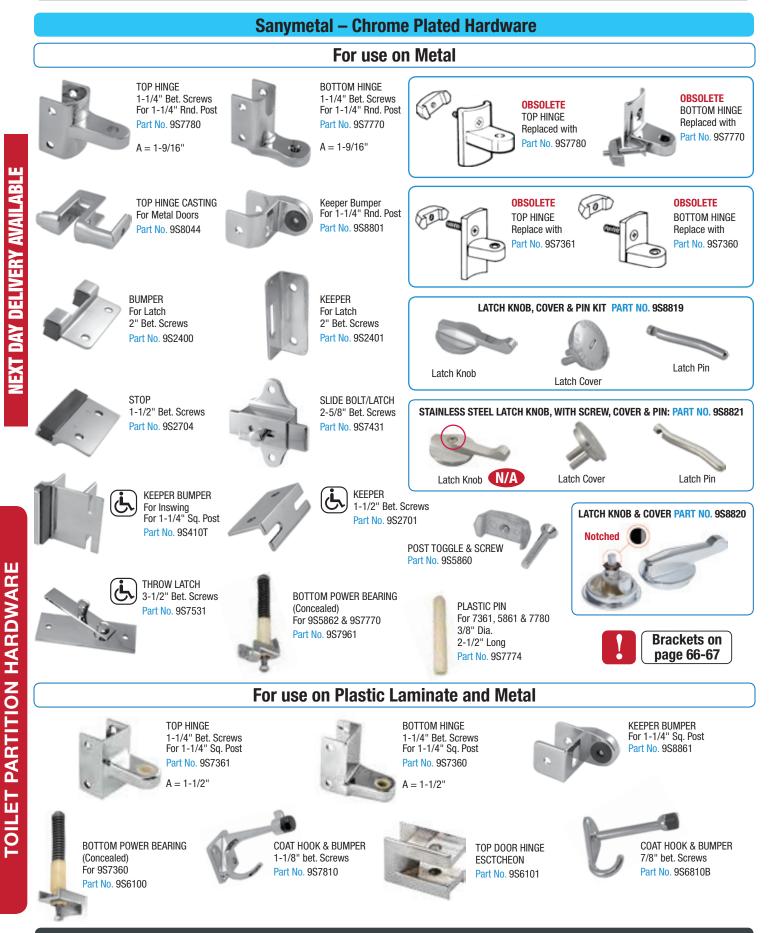


Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com Copyright © 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates.

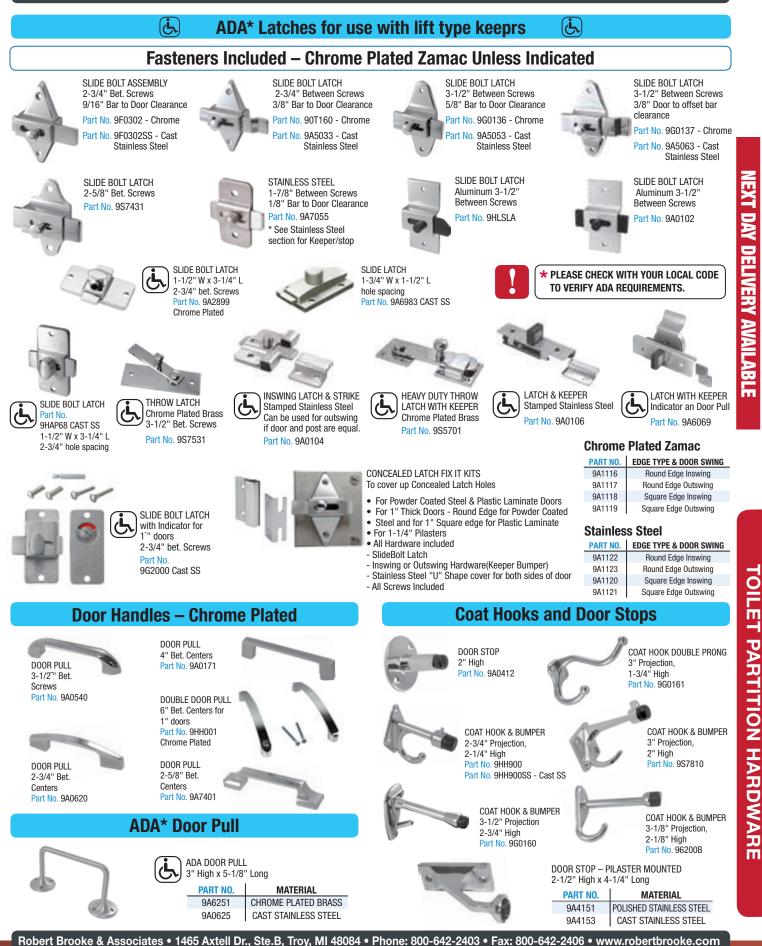

Copyright © 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates.

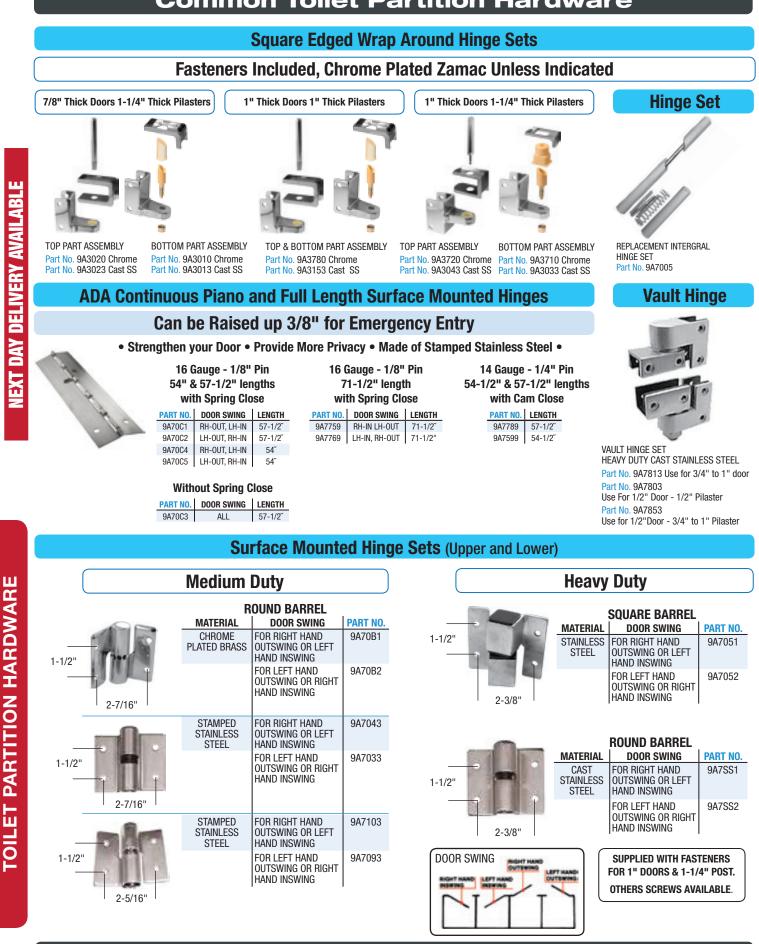


Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com Copyright © 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates.

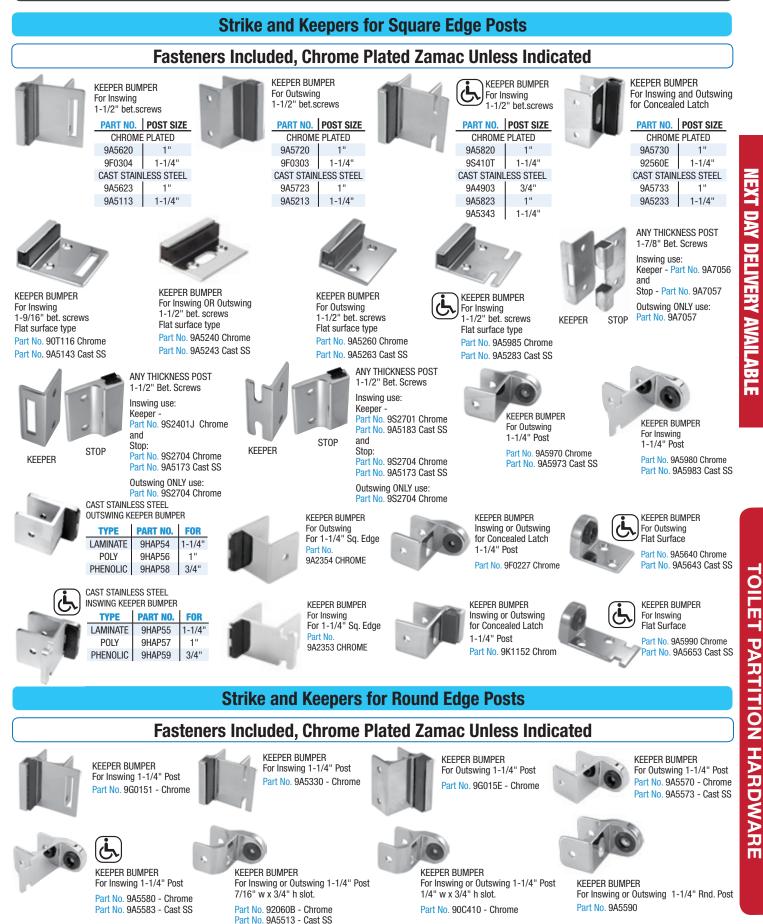




Copyright © 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates.

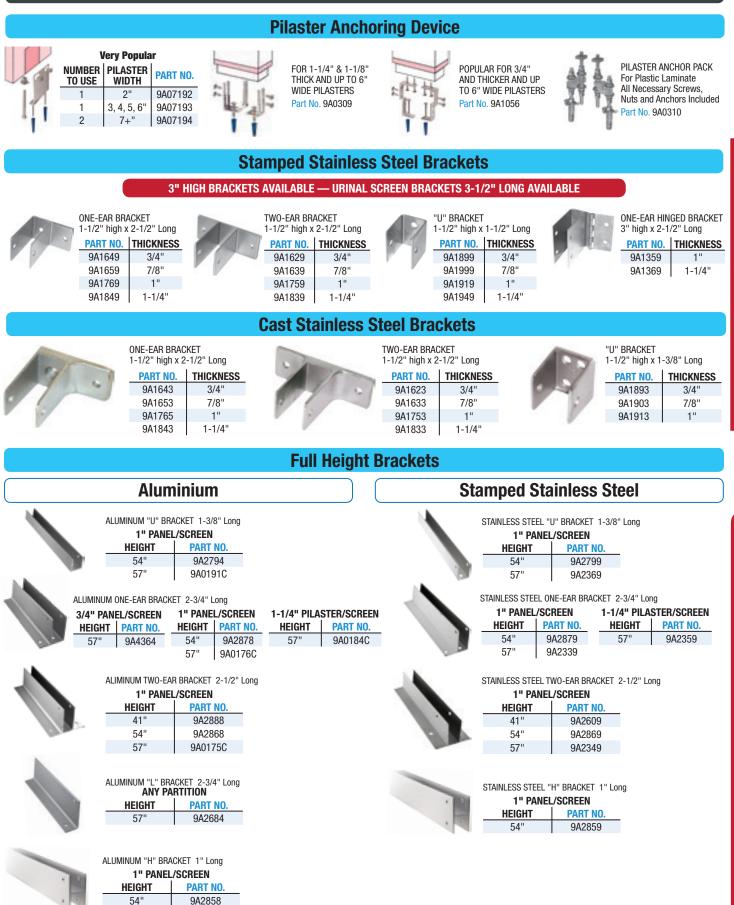

Robert Brooke & Associates • 1465 Axtell Dr., Ste.B, Troy, MI 48084 • Phone: 800-642-2403 • Fax: 800-642-2406 • www.robertbrooke.com Copyright © 2017 Robert Brooke & Associates. This catalog is copyrighted. No portion may be reproduced without the permission of Robert Brooke & Associates. NEXT DAY DELIVERY AVAILABL

67

TOILET PARTITION HARDWARE

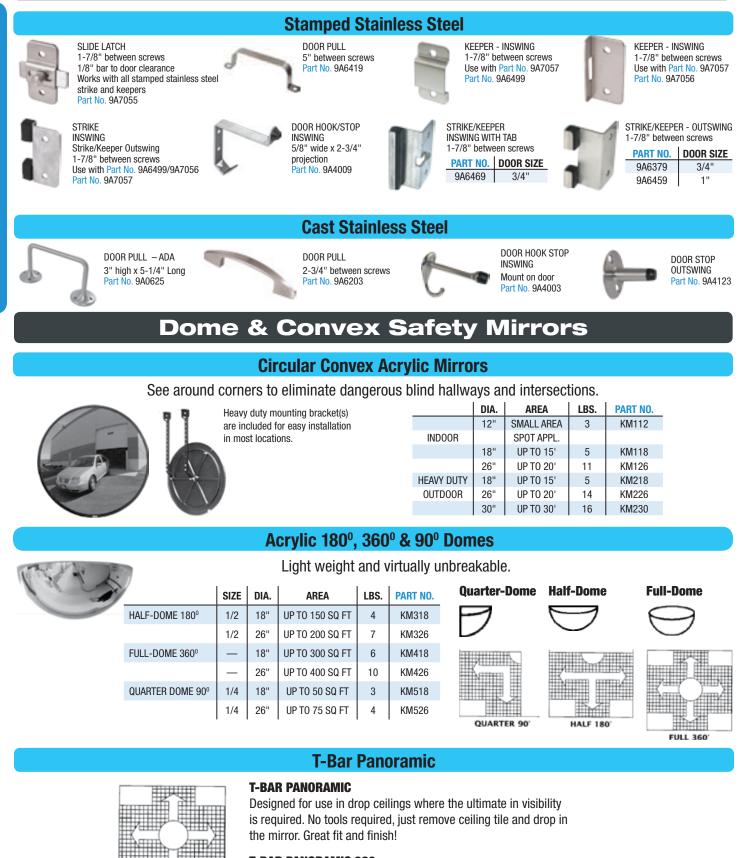

T-BAR PANORAMIC 360

FULL 360

PVT-BAR 2x2	24" DiaDesigned to mount in 2x2 T-Bar Ceiling	13lbs.
PVT-BAR 2x4	24" DiaDesigned to mount in 2x4 T-Bar Ceiling	17lbs.

SAFETY MIRRORS